
Recommended Run Times (minutes)

•	Spray – Shrub	12
•	Spray – Lawn	25
•	Rotor – Lawn	45
•	Drip – Lawn	45





Recommended Monthly Cycles

(Water Days)	1	W	ate	er	Da	ys)	
--------------	---	---	-----	----	----	-----	--

	(/ - /	
•	January	3
•	February	3
•	March	4
•	April	4
•	May	7
•	June	9
•	July	11
•	August	11
•	September	9
•	October	6
•	November	4

Recommended Maintenance

- Backflow Test Annually
- Filter Check Annually for debris
- Heads Run system monthly checking for leaks or broken heads

3

December

- Valve Covers Trim grass to keep exposed
- Controller Seasonal update programming
- Winter Run system briefly every 2 weeks if system turned off


Legend



- Control Valve
- □ Spray Shrub
- Spray Lawn
- **▼** Rotor Lawn
- Drip Tubing
- - Main Line

COMPLETION ITEMS PROVIDED

- The manufacturer's manual for the controller.
- A seasonal watering schedule.
- A list of components that require maintenance and the recommended frequency of maintenance.
- A permanent sticker has been attached to the controller indicating the warranty period for the irrigation system and contact information.
- The corrected or re-drawn design plans indicating the actual installation and components of the system.
- Location and operation of the isolation valve.

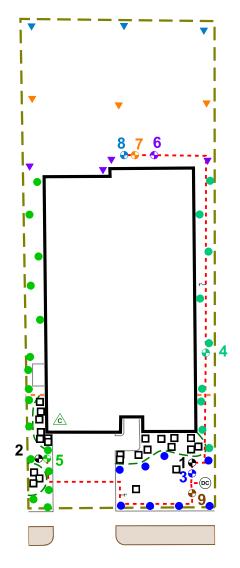

1521 SAWMILL CROSSING

JASON STUBBLEFIELD 12003




This irrigation system has been installed in accordance with all applicable state and local laws, ordinances, rules, regulations or orders. I have tested the system and determined that it has been installed according to the irrigation plan and is properly adjusted for the most efficient application of water at this time.

System Owner / Representative

Date

NOTE: ALL Piping shown is diagrammatic and NOT illustrating actual location.



PROJEC

1521 SAWMILL CROSSING ROUND ROCK, TX 78665

LOT 6, BLOCK S HOMESTEAD AT OLD SETTLERS PARK PHASE 1

IRRIGATION PLAN

COMPANY

BEST OF TEXAS LANDSCAPES LIBERTY HILL, TEXAS 78642

(512) 260-1430

www.bestoftexaslandscapes.com