

Maintenance Check List

motanatio	ii Courpictio	in Date. 5 J	14	
Address:	14505	Leopold		

The following items have been provided and explained to the irrigation system owner or system owner's representative.


- The manufacturer's manual for the controller.
- A seasonal watering schedule.

Installation Completion Data: 7-7-110

- A list of components that require maintenance and the recommended frequency of maintenance is attached
- A permanent sticker has been attached to the controller indicating the warranty period for the irrigation system and contact information.
- The corrected or re-drawn design plans indicating the actual installation and components of the system.
- Location and operation of the isolation valve.

Irrigation system owner/representative Date

This irrigation system has been installed in accordance with all applicable state and local laws, ordinances, rules, regulations or orders. I have tested the system and determined that it has been installed according to the irrigation plan and is properly adjusted for the most efficient application of water at this time.

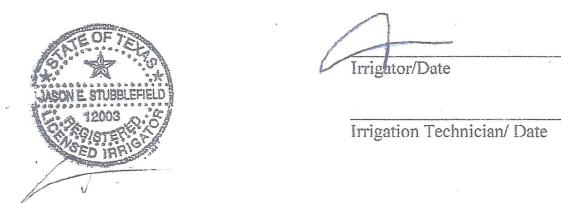



POBOX 776 HUTTO, TX 78634 (512)228-4833 (512)852-9633 fax

Zone#	Description	Head Type	Run Time(Minutes)
	bec	Sprau-bubbler	10-12
2-4	turf	spraus	125
5-8	turf	in tors	45
pally and plant was 18 ft. an in Span I have I have a growth Mile Spanish and have more a spanish about			*
		¥	
		4	
	first guarante		

Month	Average
	Cycles
Jan.	3
Feb.	3
March	4
April	4
May	7
June	9
July	9
Aug.	11
Sept.	9
Oct.	6
Nov.	4
Dec.	3

MAINTENANCE ITEMS

Backflow device - Test Annually (Call Louis Sinclair 563-8762)
Y-strainer - Check annually for debris
Heads - Run system monthly to check for leaks or broken nozzles
Valve covers - Trim grass around cover to expose
Controller - Check seasonally for correct run times
Winter - Run system briefly every 2 weeks if system remains in off position

Quantity	y Symbol	Description	Part Number	Pressure	Flow	Radius
Sprinkle			,,			M. M. L.
28		Rain Bird 10H - 1804	10H	30 psi	0.79 gpm	10 ft
24 2 4	0	Rain Bird 10Q	10Q	30 psi	0.39 gpm	
2		Rain Bird 5000-MPR-30-F - 5004-PL-FC	MPR-30-F	45 psi	5.78 gpm	
4	0	Rain Bird 5000-MPR-30-H - 5004-PL-PC	MPR-30-H	45 psi	2.96 gpm	30 ft
10	0	Rain Bird 5000-MPR-30-Q - 5004-PL-PC	MPR-30-Q	45 psi	1.4 gpm	30 ft
10	0	Rain Bird 8H - 1804	8H	30 psi	0.52 gpm	8 ft
14	0	Rain Bird 8Q - 1804	8Q	30 psi	0.26 gpm	8 ft
Meters/I	Pumps					
1	M					
Backflo	w Devices					
1	60	Febco 715 - 1"	715 - 1"			
Control	Valves			•		
9	•	Rain Bird 100-DVF	100-DVF			
Y-Strain	ers / Filter	S		•		
1	653	Febco 650A-1"	4305			
Irrigatio	n Accesso	ries				
1	M	Nelson 9501-100IN	9501-100IN			
1	A	Rain Bird ESP-4Me	ESP4ME			
1		Rain Bird RSD-BEx	RSD-BEx			
Lateral	Line Pipe	Accession was a second and a second a second and a second a second and				
897 ft	1	Class 200 1"	0			
Mainline	Pipe	to the second se	***************************************			
293 ft	100000	Class 200 1"	0			

Water Source #1		
Meter Size	5/8 inch meter	
Static Pressure	65 psi	
Elevation Change	0 ft	
Service Line Information		
Pipe Category	Class 200 PVC	
Pipe Size	Class 200 1"	
Length	5 ft	
Velocity	5 fps	
Recommendations		
Maximum Recommended Flow	13 gpm	
Available Working Pressure	58.39 psi	

16505 LEOPOLD

Design pressure all zones 65psi.





JASON STUBBLEFIELD 3/2/2016

