

Maintenance Check List

Installation Completion Date: 3-17-16


Address: 18221 Chimson Apple

The following items have been provided and explained to the irrigation system owner or system owner's representative.

- The manufacturer's manual for the controller.
- A seasonal watering schedule.
- A list of components that require maintenance and the recommended frequency of maintenance is attached
- A permanent sticker has been attached to the controller indicating the warranty period for the irrigation system and contact information.
- The corrected or re-drawn design plans indicating the actual installation and components of the system.
- Location and operation of the isolation valve.

Irrigation system owner/representative Date

This irrigation system has been installed in accordance with all applicable state and local laws, ordinances, rules, regulations or orders. I have tested the system and determined that it has been installed according to the irrigation plan and is properly adjusted for the most efficient application of water at this time.



Irrigator/Date

Irrigation Technician/ Date



POBOX 776 HUTTO, TX 78634 (512)228-4833 (512)852-9633 fax

Zone#	Description	Head Type	Run Time(Minutes)
7	bed	Sprau-buk	ler 10-12
2-3	turf	spraus	25
4-9	turf	Potors	45
10	grass	drip	30
	V		
and in the time participate of the participan distance defining			
		in the consequence of the contract of the cont	
	3	(


Month	Average
	Cycles
Jan.	3
Feb.	3
March	4
April	4
May	7
June	9
July	11
Aug.	11
Sept.	9
Oci.	6
Nov.	4
Dec.	3

MAINTENANCE ITEMS

Backflow device - Test Annually (Call Louis Sinclair 563-8762)
Y-strainer - Check annually for debris
Heads - Run system monthly to check for leaks or broken nozzles
Valve covers - Trim grass around cover to expose
Controller - Check seasonally for correct run times
Winter - Run system briefly every 2 weeks if system remains in off position


Irrigat	ion					
Quantity	Symbo	Description	Part Number	Pressure	Flow	Radi
Sprinkle	rs					
2		Rain Bird 10F - 1804	10F	30 psi	1.58 gpm	10 ft
12	0	Rain Bird 10H - 1804	10H	30 psi	0.79 gpm	10 ft
16	0	Rain Bird 10Q	10Q	30 psi	0.39 gpm	
10	0	Rain Bird 1300A-F	1300AF	30 psi	1.7 gpm	0 ft
10	0	Rain Bird 5000-MPR-30-H - 5004-PL-PC		45 psi	2.96 gpm	
21	0	Rain Bird 5000-MPR-30-Q - 5004-PL-PC	MPR-30-Q	45 psi	1.4 gpm	30 ft
9	0	Rain Bird 8H - 1804	8H	30 psi	0.52 gpm	8 ft
10	0	Rain Bird 8Q - 1804	8Q	30 psi	0.26 gpm	8 ft
Meters/P	umps					
1	M			1		
Backflow	Devices			•		
1	69	Febco 715 - 1"	715 - 1"	1		
Control \	Valves	ALC: The second	- Andrewson - Andr	•		
12	- A	Rain Bird 100-DVF	100-DVF	1		
	ers / Filte			3		
1		Febco 650A-1"	14305	1		
	Accesso			,		
1	D4	Nelson 9501-100IN	9501-100IN	1		
1	A	Rain Bird ESP-4Me	ESP4ME	1		
1	- 8	Rain Bird RSD-BEx	RSD-BEx	1		
Lateral L	ine Pipe			•		
463 ft	T	Class 200 1"	10	1		
Mainline	Pipe			•		
138 ft		Class 200 1"	0 .	1		
Drip Tub	ina			-		
51 ft		Rain Bird LD-09-12	LD-09-12	1		
<u> </u>	-		***************************************	•		
		N	,			
		14				


Meter Size	5/8 inch meter		
Static Pressure	65 psi		
Elevation Change	0 ft		
Service Line Information			
Pipe Category	Class 200 PVC		
Pipe Size	Class 200 1"		
Length	5 ft		
Velocity	5 fps		
Recommendations			
Maximum Recommended Flow	13 gpm		
Available Working Pressure	58.39 psi		

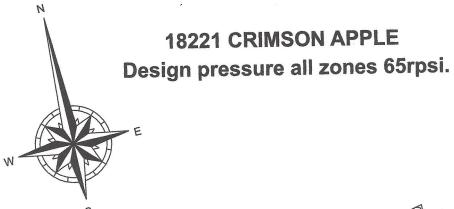



JASON STUBBLEFIELD 3/17/2016



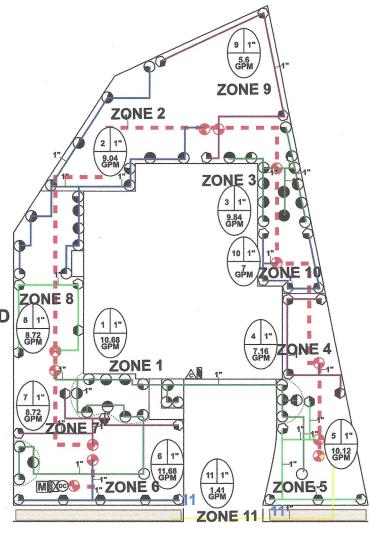

18221 CRIMSON APPLE